





Ciro

Technical Data Sheet

Colours

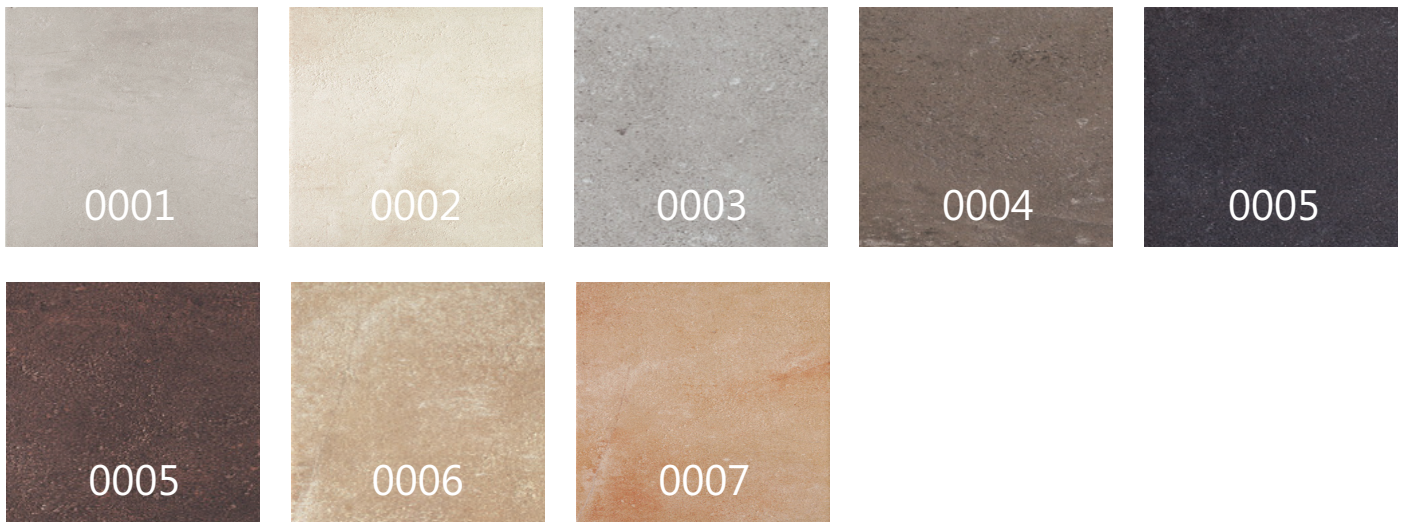

Finishes

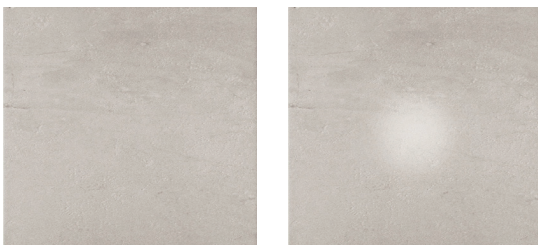

Natural (N)
R10 A

Polished (P)
-

Sizes & Formats (cm)

	15x60 9.5mm	30x30 9.5mm	30x60 9.5mm	15x15 9.5mm	45x45 9.5mm 4.5mm	45x90 10.5mm 4.5mm	60x60 10.5mm 4.5mm	60x120 10.5mm 4.5mm	90x90 10.5mm
0001	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P
0002	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P
0003	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P
0004	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P
0005	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P
0006	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P
0007	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P	N/P



Ciro

Technical Data Sheet

Technical Details

Supply of wear-resistant, stain proof, frost proof, first grade, pressed, full body coloured porcelain stoneware tiles, fully vitrified in accordance with standards UNI EN 14411-G ISO 13006 - Group BIa - with 0.1% water absorption.

Features

- Dimension & surface quality
- Water absorption
- Flexural strength
- Frost resistance
- Resistance to acids & alkalis
- Wear & abrasion resistance
- Linear thermal expansion
- Light fastness
- Stain resistance

Standards

- UNI EN ISO 10545-2
- UNI EN ISO 10545-3
- UNI EN ISO 10545-4
- All standards
- UNI EN ISO 10545-13
- UNI EN ISO 10545-8
- DIN 51094
- UNI EN ISO 10545-14

Results

- Very low tolerance
- $\leq 0.10\%$
- N/mm² 50-60
- Guaranteed
- GLA
- Adaquate for all purposes
- 6×10^{-6}
- No change in colours
- Guaranteed

