




Karmon

Technical Data Sheet

Colours



Finishes

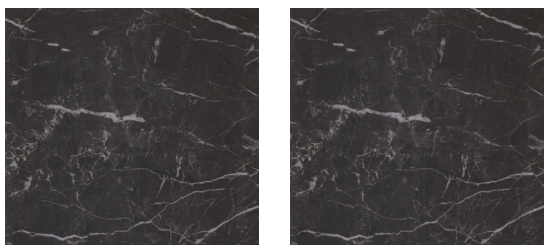

Natural (N)
R9

Polished (P)
-



Karmon

Technical Data Sheet

Sizes & Formats

	9,8x59cm 10mm	29,5x59cm 10mm	59x59cm 10mm	29,5x118cm 10mm	59x118cm 10mm
0001	N/P	N/P	N/P	N/P	N/P
0002	N/P	N/P	N/P	N/P	N/P
0003	N/P	N/P	N/P	N/P	N/P
0004	N/P	N/P	N/P	N/P	N/P
0005	N/P	N/P	N/P	N/P	N/P
0006	N/P	N/P	N/P	N/P	N/P
0007	N/P	N/P	N/P	N/P	N/P
0008	N/P	N/P	N/P	N/P	N/P
0009	N/P	N/P	N/P	N/P	N/P
0010	N/P	N/P	N/P	N/P	N/P
0011	N/P	N/P	N/P	N/P	N/P
0012	N/P	N/P	N/P	N/P	N/P
0013	N/P	N/P	N/P	N/P	N/P
0014	N/P	N/P	N/P	N/P	N/P
0015	N/P	N/P	N/P	N/P	N/P
0016	N/P	N/P	N/P	N/P	N/P
0017	N/P	N/P	N/P	N/P	N/P
0018	N/P	N/P	N/P	N/P	N/P
0019	N/P	N/P	N/P	N/P	N/P
0020	N/P	N/P	N/P	N/P	N/P
0021	N/P	N/P	N/P	N/P	N/P
0022	N/P	N/P	N/P	N/P	N/P
0023	N/P	N/P	N/P	N/P	N/P



Karmon Technical Data Sheet

Technical Details

Supply of wear-resistant, stain-proof, frost proof, first grade, pressed, unglazed porcelain stoneware tiles with chromatic effects obtained by full body colouring only, fully vitrified in accordance with standards UNI EN 14411-G ISO 13006 - Group BIa UGL - with 0.1% water

Features	Standards	Results
Dimension & surface quality	UNI EN ISO 10545-2	Very low tolerance
Water absorption	UNI EN ISO 10545-3	$\leq 0.10\%$
Flexural strength	UNI EN ISO 10545-4	50-60 N/mm ²
Linear thermal expansion	UNI EN ISO 10545-8	6×10^{-6}
Thermal shock resistance	UNI EN ISO 10545-9	-
Frost resistance	UNI EN ISO 10545-12	Guaranteed
Resistance to acids & alkalis	UNI EN ISO 10545-13	GA
Stain resistance	UNI EN ISO 10545-14	Guaranteed
Light fastness	DIN 51094	No change in colours

