



3
COLOURS

1
SIZES

2
FINISH

3
SPECIAL PIECES

VERSATEC is a full bodied, unglazed porcelain tile collection available in two finishes and three popular colours, with a wide selection of special pieces.


This collection has high slip resistant properties making it perfect for use in commercial areas like wet rooms, swimming pools and changing rooms, allowing for a seamless and slip resistant finish.

Suitable for installation outdoors, on walls and floors.

This collection has the following recycled content:

White and Black – 6%
Grey – 36%

Available Colours

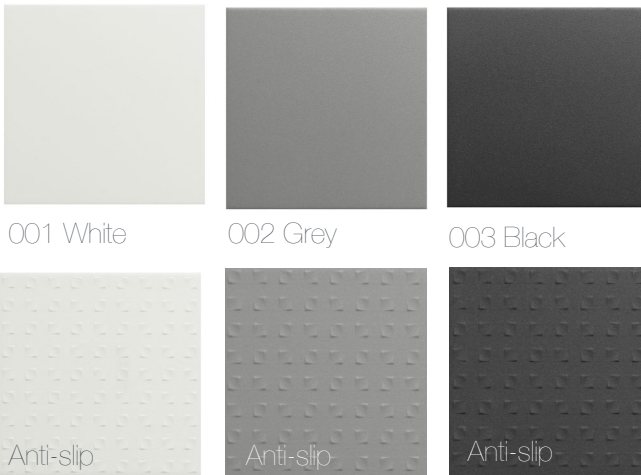

Special Pieces (Available in all colours)



PORCELAIN	8.3mm Thick	Wall/Floor
	Matt	All Tiles
147x147	✓	Wall & Floor
297x97 Coving	✓	Floor
250x97 Corner	✓	Floor

Group

Bla – Porcelain

	Standard	Requirement	Established Values
Length & Width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.08\%$
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Ave $\geq 1800\text{N}$
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave > 35 N/mm ²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$\leq 175\text{mm}^2$	Ave $\leq 130\text{mm}^2$
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHC
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to Stain	ISO 10545-14	Declare Value	4
Reaction to Fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.